



10.Side Garnish

A: REMOVAL

Remove the clips and detach the side garnish assembly.

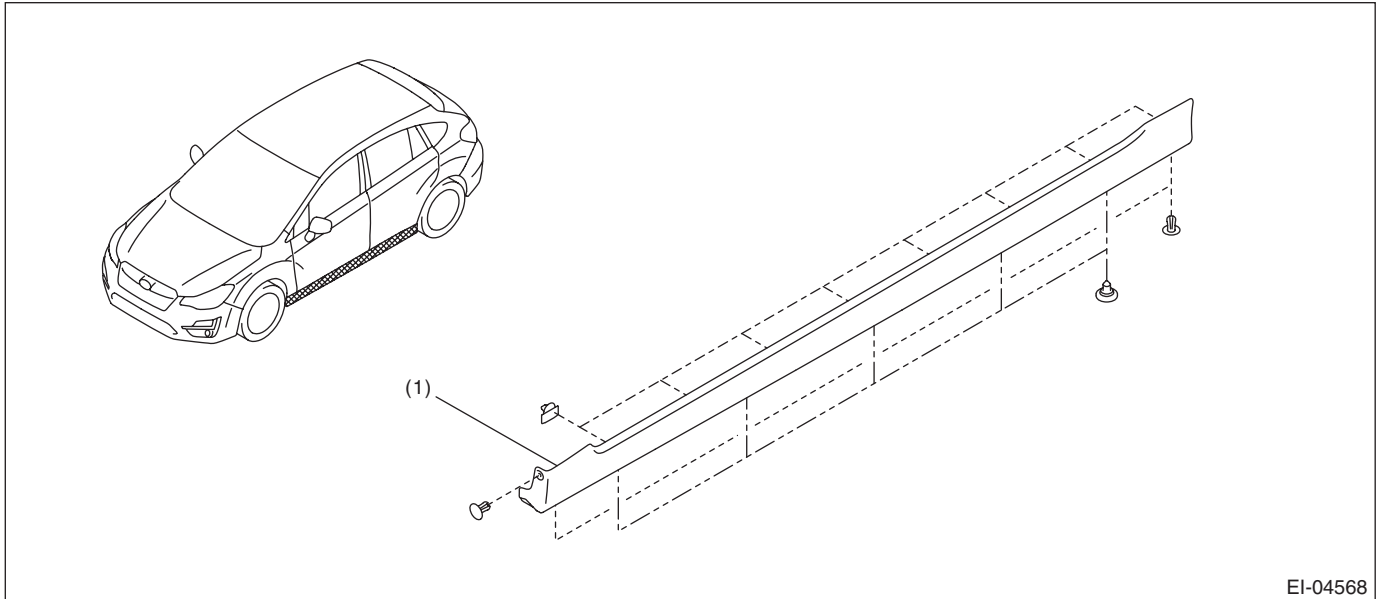

EI-04568

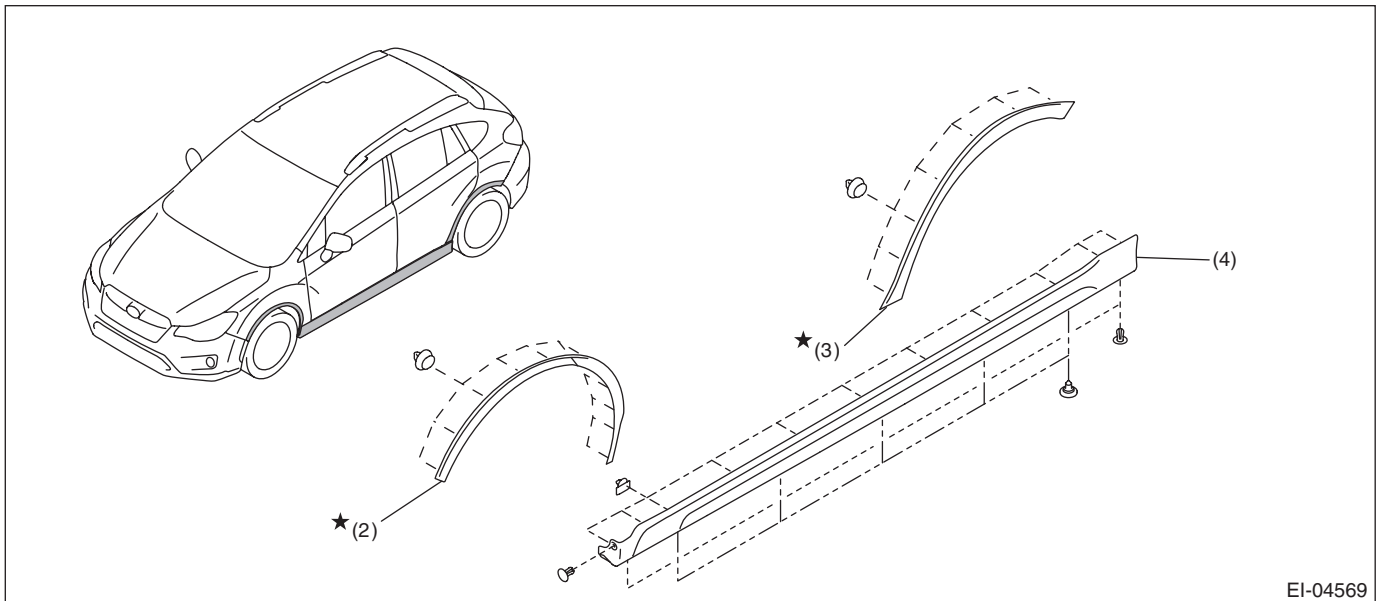

EI-04569

(1) Garnish ASSY - side sill
(except for XV model)

(2) Garnish ASSY - fender
(XV model)

(3) Garnish ASSY - rear quarter
(XV model)

(4) Garnish ASSY - side sill
(XV model)

B: INSTALLATION

CAUTION:

Do not reuse the garnish assembly. Deformation occurs on the garnish assembly when once removed, and this may cause improper adhesion.

- 1) Install each part in the reverse order of removal.
- 2) For XV model, install the garnish assembly - fender and the garnish assembly - rear quarter.
 - (1) Remove the double-sided tape remaining on the vehicle body, then clean the adhesive surface.

CAUTION:

If even a slight amount of double-sided tape remains on the adhesive surface, it may lead to improper adhesion.

- (2) Heat the vehicle body and the garnish for 1 — 3 minutes using a heat light or a drier.

CAUTION:

Be careful not to burn yourself.

- (3) Apply primer to the installation surfaces of garnish, and wait till the primer dries.
- (4) Attach new double-sided tape on garnish.
- (5) Apply primer to the garnish installation surface on the vehicle body side, and wait till the primer dries.
- (6) Peel off the backing papers, engage the clips, and adhere the garnish assembly to the vehicle body.

CAUTION:

Press-fit the garnish assembly to adhere securely.