

## 6. VDC Sequence Control

### A: OPERATION

- 1) While the VDC sequence control is performed, the operation of the hydraulic unit can be checked using the brake tester or pressure gauge after the hydraulic unit solenoid valve is operated.
- 2) VDC sequence control can be started by Subaru Select Monitor.

#### 1. VDC SEQUENCE CONTROL WITH SUBARU SELECT MONITOR

**NOTE:**

In the event of any trouble, sequence control will not operate.

- 1) Connect the Subaru Select Monitor to data link connector.
  - (1) Run the "PC application for Subaru Select Monitor".
  - (2) On «Main Menu» display, select «Each System Check».
  - (3) Select «Brake Control System». When «VDC» is displayed, select the [OK] button.
  - (4) From «Work Support», select «VDC Function Check Mode». (Models without EyeSight)
  - (5) From «Function Check Sequence», select «VDC Function Check Mode». (Models with EyeSight)
- 2) Operate according to the procedures displayed in the Subaru Select Monitor.
- 3) The brake system being operated is displayed on the Subaru Select Monitor.


# VDC Sequence Control

VEHICLE DYNAMICS CONTROL (VDC)

## 2. CONDITIONS FOR VDC SEQUENCE CONTROL

NOTE:

The control operation starts at point A.

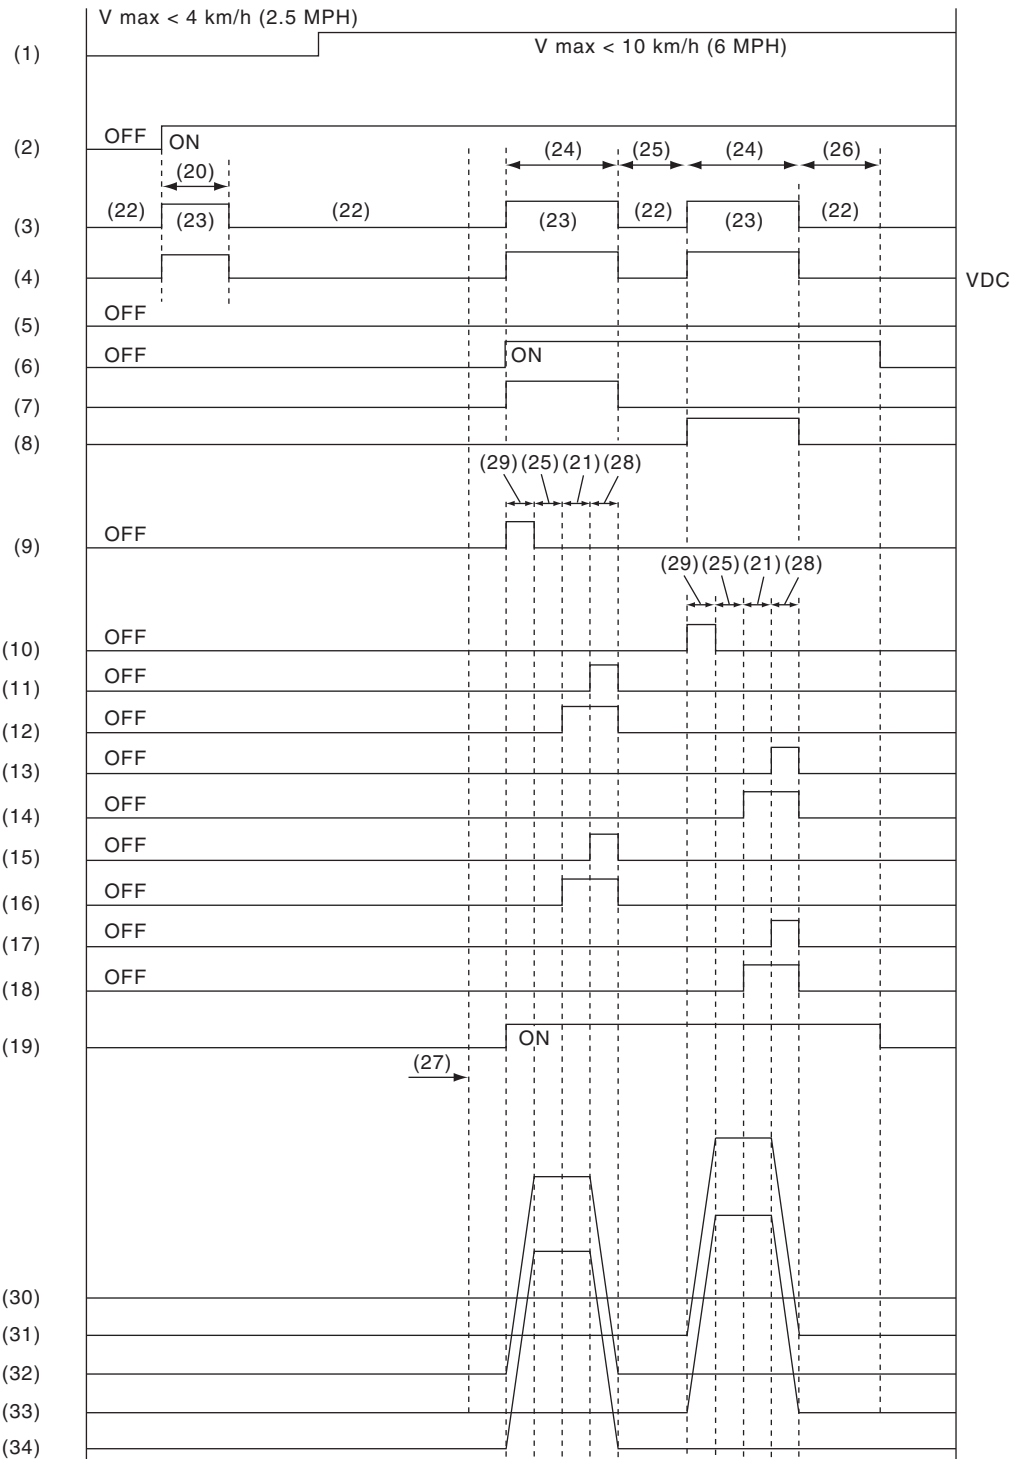

VDC00989

# VDC Sequence Control

VEHICLE DYNAMICS CONTROL (VDC)

(1) All wheel speed	(13) FR decompression valve	(25) 1 second
(2) Ignition key	(14) FR compression valve	(26) 1.6 seconds
(3) ABS warning light	(15) RR decompression valve	(27) Point A
(4) VDC warning light	(16) RR compression valve	(28) 0.4 seconds
(5) Switch - stop light	(17) RL decompression valve	(29) 0.8 seconds
(6) Valve relay	(18) RL compression valve	(30) Master cylinder pressure
(7) VDC switching valve 1 FL	(19) Pump motor	(31) FR wheel cylinder pressure
(8) VDC switching valve 1 FR	(20) A few seconds	(32) FL wheel cylinder pressure
(9) VDC switching valve 2 FL	(21) 1.2 seconds	(33) RL wheel cylinder pressure
(10) VDC switching valve 2 FR	(22) Light OFF	(34) RR wheel cylinder pressure
(11) FL decompression valve	(23) Light ON	
(12) FL compression valve	(24) 3.4 seconds	

## B: SPECIFICATION

### 1. CONDITIONS FOR COMPLETION OF VDC SEQUENCE CONTROL

When the following conditions develop, the VDC sequence control stops and VDC operation is returned to the normal control mode.

- When the speed of at least one wheel reaches 10 km/h (6 MPH).
- After completion of VDC sequence control.
- When a malfunction is detected.